Whirlpool

SMART LOW PROFILE MICROWAVE HOOD COMBINATION **WMML5530R**



Easily vent smoke and odors with this 450 CFM Motor Class MHC that comes equipped with a hood fan for powerful ventilation. This 30" MHC also comes with a detachable grease filter for convenient cleaning and LED cooktop lighting.

HOOD PERFORMANCE

Duct Orientation	Size	Damper	Sones		CFM*			
			Low	High	Low	High (0.1 in.w.g.)	High (0.25 in.w.g.)	
Vertical	10x3.25 in.	Included	2.45	5.863	137	239	206	
Horizontal	10x3.25 in.	Included	2.994	6.041	130	223	193	

FEATURES					
Motor class CFM**	450 CFM				
Lighting	Single LED lamp				
Hood speed	4				
Grease filter	Aluminum (Qty.2)				
Charcoal filter	Charcoal (QTY.2)				
Venting	Exhaust or Recirculation				
Energy star	No				
AC INPUT					
120V, 60HZ					
MOUNTING HEIGHT					

From cooktop to the bottom of MHC 12 1/8" (Minimum) - 18 1/8" (Recommend)

LIMITED WARRANTY

1 year limited warranty (See manual for full detail)

FOR INDOOR USE ONLY

50

0.900

0.800

0.700

× 0.600

0.500

S 0.400


L 0.300

0.100


0.000

Stat 0.200





A. 297/8" (76 cm) В. 10⁵/₁₆" (26.2 cm) C. 181/2" (46.9 cm)

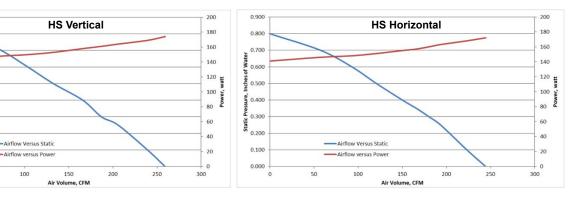

*When configured for outside ventilation. Independently tested through the AHAM Verified program

** Max. blower CFM indicates the performance of the hood blower in open air

Airflow versus Po

100

***Recommended to use a rectangular duct (3.25" x 10") or a round duct (6") to help achieve better airflow performance. Different duct sizes and transitions can have different back pressure and get different airflow performance. Shorter duct length and fewer transitions can help achieve better airflow performance.

For questions about features, operation/performance, parts, accessories or service, call: 1-866-698-2538 or visit our website at www.whirlpool.com In Canada, call 1-800-807-6777 or visit our website at www.whirlpool.ca

'HIRLPOOL 30" MHC WMML5530R SPECIFICATION SHEET